
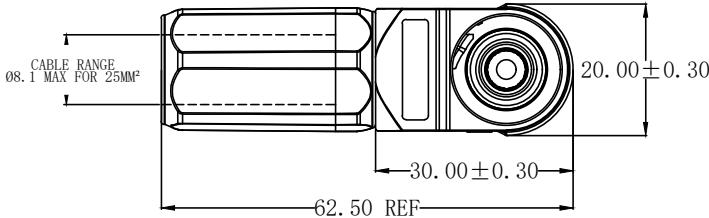



C/N: HLK	P/C:	P/N:HLK-201 Ø6.0 Female	CUSTOMER REV:	APPROVED BY:
----------	------	-------------------------	---------------	--------------

REVISIONS			
REV.	DESCRIPTION	DATE	SIGANTURE
△A			
△B			
△C			

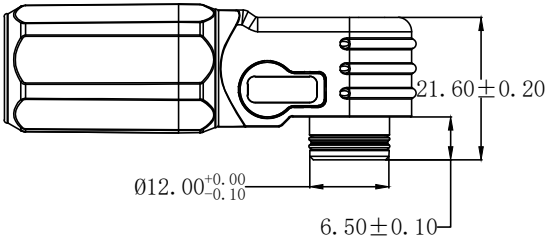

- NOTES:
- Rated voltage:1000V DC
 - 电压等级:1000V DC
 - Rated current (25℃):120A Max (25mm²)
 - 额定工作电流 (25℃):120A Max (25mm²)
 - Withstand voltage:3000V
 - 耐压等级:3000V
 - Contact resistance:≤10mΩ
 - 接触电阻:≤10mΩ
 - Insulation resistance:≥1000MΩ
 - 绝缘电阻:≥1000MΩ
 - Mechanical life:≥1000次
 - 插拔寿命:≥1000次
 - Ingree of protection rating:IP67
 - 防护等级:IP67
 - Temperature:-40~+125℃
 - 耐温:-40~+125℃
 - Plastic material:nylon UL94-V0, BLACK/RED
 - 塑胶材质: 尼龙 UL94-V0, 黑色/红色

未注明公差指定 (单位:mm)	
0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2



SIGNATURE		HONLIX[®] HONLIX INC. HTTP://WWW.HONLIX.COM		
ENGINEER BY:				
MANAGER BY:		PRODUCT NO:HLK-XXX	DATE: 2024.03.19	
CHECKED BY:		UNIT: mm	SHEET: 1 OF 1	REV.
SEALES BY:		DWG NO:HLK-201		0