




C/N: HLK P/C: P/N:HLK-203 Ø8.0 Female CUSTOMER REV: APPROVED BY:

REVISIONS

REV.	DESCRIPTION	DATE	SIGANTURE
A			
B			
C			

NOTES:

1. Rated voltage:1000V DC
1. 电压等级:1000V DC
2. Rated current (25℃):200A Max (50mm²)
2. 额定工作电流 (25℃):200A Max (50mm²)
3. Withstand voltage:3000V
3. 耐压等级:3000V
4. Contact resistance:≤10mΩ
4. 接触电阻:≤10mΩ
5. Insulation resistance:≥1000MΩ
5. 绝缘电阻:≥1000MΩ
6. Mechanical life:≥1000次
6. 插拔寿命:≥1000次
7. Ingree of protection rating:IP67
7. 防护等级:IP67
8. Temperature:-40~+125℃
8. 耐温:-40~+125℃
9. Plastic material:nylon UL94-V0, BLACK/RED
9. 塑胶材质: 尼龙 UL94-V0, 黑色/红色

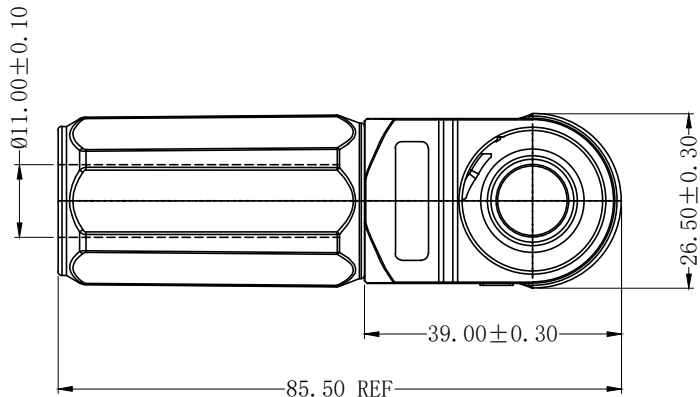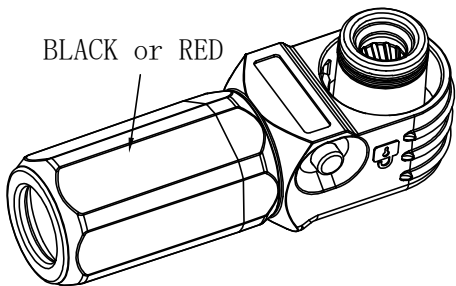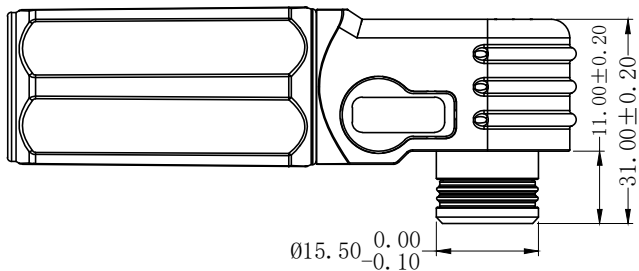

未注明公差指定 (单位:mm)

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2



SIGNATURE

ENGINEER BY:

MANAGER BY:

CHECKED BY:

SEALES BY:

HONLIX®HONLIX INC.
HTTP://WWW.HONLIX.COM

PRODUCT NO:HLK-XXX

DATE: 2024.03.19

UNIT: mm

SHEET: 1 OF 1

REV.

DWG NO:HLK-203

0