
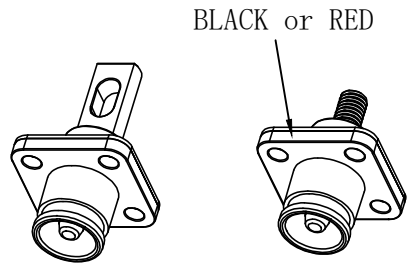
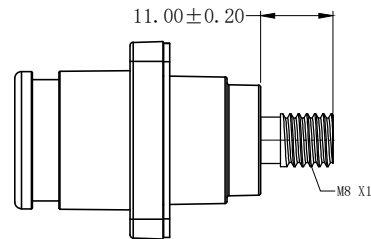
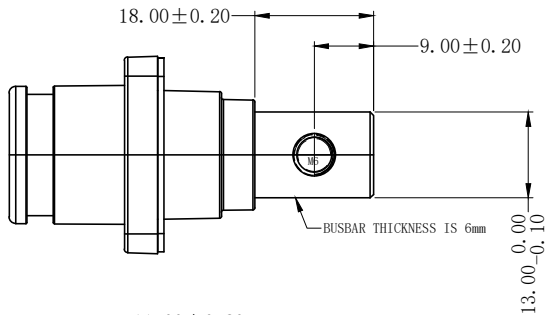


C/N: HLK	P/C:	P/N:HLK-204 Ø8.0 Male	CUSTOMER REV:	APPROVED BY:	REVISIONS			
REV.		DESCRIPTION		DATE	SIGNATURE			

△A			
△B			
△C			


NOTES:

- Rated voltage:1000V DC
- 电压等级:1000V DC
- Rated current (25℃):200A Max (50mm²)
- 额定工作电流 (25℃):200A Max (50mm²)
- Withstand voltage:3000V
- 耐压等级:3000V
- Contact resistance:≤10mΩ
- 接触电阻:≤10mΩ
- Insulation resistance:≥1000MΩ
- 绝缘电阻:≥1000MΩ
- Mechanical life:≥1000次
- 插拔寿命:≥1000次
- Ingree of protection rating:IP67
- 防护等级:IP67
- Temperature:-40~+125℃
- 耐温:-40~+125℃
- Plastic material:nylon UL94-V0, BLACK/RED
- 塑胶材质:尼龙 UL94-V0, 黑色/红色

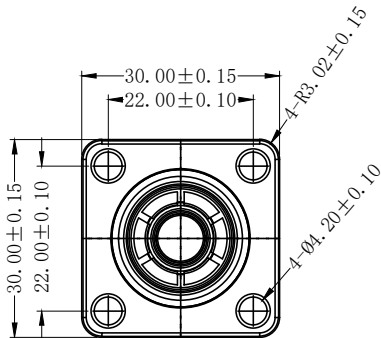

BUSBAR TYPE

SCREW TYPE

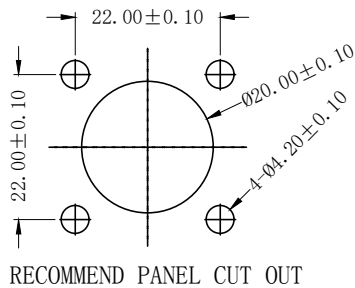

RECOMMEND PANEL CUT OUT

未注明公差指定 (单位:mm)

0~5	±0.2
5~15	±0.3
15~30	±0.5
30~100	±0.8
100~300	±1.0
300~1000	±1.2



SIGNATURE		HONLIX® HONLIX INC. HTTP://WWW.HONLIX.COM		
ENGINEER BY:				
MANAGER BY:		PRODUCT NO:HLK-XXX	DATE: 2024.03.19	
CHECKED BY:		UNIT: mm	SHEET: 1 OF 1	REV.
SEALES BY:		DWG NO:HLK-204		0